


MODELS 5715K17 / 6715K17

1.5 HP SINGLE STAGE TWO CYLINDER
PORTABLE ELECTRIC COMPRESSORS



MODEL 5715K17

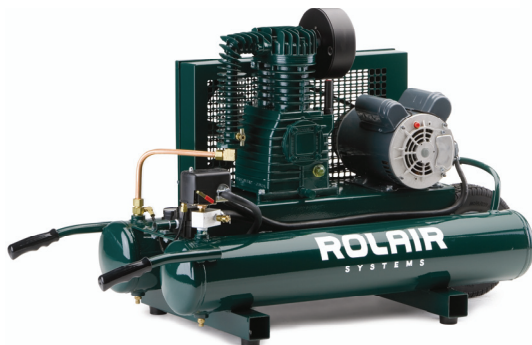

MODEL 6715K17

ROLAIR STANDARD FEATURES

PUMP: ROLAIR Quality, Heavy-Duty, Single Stage, Ball Bearings, Cast-Iron Twin Cylinders, Hardened Steel Valve Plates with Swedish Lamellar Reed Valves, Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11" Flywheel, Oil Sight Gauge and Splash Lubrication.

MOTOR: 1.5 HP 1755 RPM Open Drip-Proof
115/230 Volts, 60 Hz Ball Bearings
Overload Protected with Manual Reset

PERFORMANCE @ 100 PSI:
Cu. Ft. Displaced - 10.1
Cu. Ft. Free Air - 6.9

TANK ASSEMBLY: Non-Code, 9 Gallons

DIMENSIONS:
L46" x W19" x H28" - 5715K17
L46" x W27" x H28" - 6715K17

WHEELS: One 410/350 x 4 *Flat-Free Tire* - 5715K17
Two 410/350 x 4 *Flat-Free Tires* - 6715K17

APPROXIMATE SHIPPING WEIGHT:
174 lbs. - 5715K17
191 lbs. - 6715K17

STANDARD EQUIPMENT

- Industrial Square D Pressure Switch with Relief Valve
- Intake Filter with Silencer and Replaceable Element
- Universal Quick Disconnect Fitting
- Totally Enclosed Steel Belt Guard
- 12-3 Cord with Dead Front Plug
- Accessory Support Bracket
- Pressure Gauge 0-200 in 5 lb. Graduations
- 110/135 PSI Operating Pressure
- On/Off Lever
- Safety Relief Valve
- Air-Cooled Aftercooler

OPTIONAL EQUIPMENT

Constant Speed Operation, Dual Control Operation, Dual Voltage Switch, Filter-Regulator-Lubricator Sets, Fully-Pneumatic Tires



ROLAIR SYSTEMS

606 S. LAKE ST, P O BOX 346, HUSTISFORD WI 53034-0346
SALES FAX: 920.349.3691 - SERVICE FAX: 920.349.8861
PHONE: 920-349-3281

www.rolair.com



ROLAIR STANDARD FEATURES

PUMP: ROLAIR Quality, Heavy-Duty, Single Stage, Ball Bearings, Cast-Iron Twin Cylinders, Hardened Steel Valve Plates with Swedish Lamellar Reed Valves, Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11" Flywheel, Oil Sight Gauge and Splash Lubrication.

MOTOR: 1.5 HP 1755 RPM Open Drip-Proof
115/230 Volt, 60 Hz Ball Bearings
Overload Protected with Manual Reset

PERFORMANCE @ 100 PSI:
Cu. Ft. Displaced - 10.1
Cu. Ft. Free Air - 6.9

TANK ASSEMBLY: Non-Code, 20 Gallons

DIMENSIONS:
L42" x W22" x H34"

WHEELS: Two 410/350 x 4 *Flat-Free Tires*

APPROXIMATE SHIPPING WEIGHT:
198 lbs.

STANDARD EQUIPMENT

- Industrial Square D Pressure Switch with Relief Valve
- Intake Filter with Silencer and Replaceable Element
- Universal Quick Disconnect Fitting
- Totally Enclosed Steel Belt Guard
- 12-3 Cord with Dead Front Plug
- Accessory Support Bracket
- Pressure Gauge 0-200 in 5 lb. Graduations
- 110/135 PSI Operating Pressure
- On/Off Lever
- Safety Relief Valve

OPTIONAL EQUIPMENT

Constant Speed Operation, Dual Control Operation, Dual Voltage Switch, Filter-Regulator-Lubricator Sets, Fully-Pneumatic Tires, ASME Tank

ROLAIR SYSTEMS

606 S. LAKE ST, P O BOX 346, HUSTISFORD WI 53034-0346
SALES FAX: 920.349.3691 - SERVICE FAX: 920.349.8861
PHONE: 920-349-3281

www.rolair.com

